



ÉLINGUE DE LEVAGE ARTICULÉE

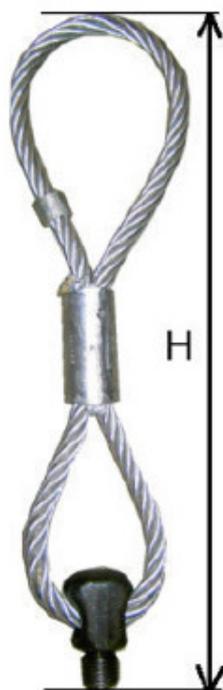

5 Coefficient
Sécurité

Certifié
CE

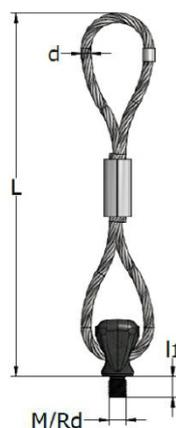

SPÉCIFICATIONS TECHNIQUES

Ref.	Rd Ø (mm)	Charge (T)	L (mm)	Ø du câble(mm)
29403	12	0.5	335	8
29029	16	1.2	385	8
34120	16	2.5	345	9
29031	20	2.0	470	10
33925	20	4.0	410	12
29404	24	2.5	550	12
33926	24	5.0	435	14
31278	30	7.5	490	16
33910	36	10.0	570	18